

Customer Reference

Ordered Date

Delivery Date

Contact Number

Email

Customer Name and Address

Delivery Address (If different from above)


Debar Openview Bi Fold Quote / Order Form

Qty	Width	Height	Trickle Vent Qty (Within 38mm Head Extension)					
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>					
Profile Colour	Cill	Addon 20 / 38	Handle Colour	Opening	Drainage	Threshold	Glazing	
White 9016 G <input type="checkbox"/>	None <input type="checkbox"/>	Top <input type="checkbox"/>	Chrome <input type="checkbox"/>	In <input type="checkbox"/>	None <input type="checkbox"/>	Standard <input type="checkbox"/>	Glazed** <input type="checkbox"/>	
Grey 7016 M <input type="checkbox"/>	90mm <input type="checkbox"/>	Bottom <input type="checkbox"/>	White <input type="checkbox"/>	Out <input type="checkbox"/>	Face <input type="checkbox"/>	Low* <input type="checkbox"/>	Unglazed <input type="checkbox"/>	
Black 9005 M <input type="checkbox"/>	150mm <input type="checkbox"/>	Left <input type="checkbox"/>	Satin <input type="checkbox"/>		Concealed <input type="checkbox"/>	Intergrated Cill <input type="checkbox"/>	Other <input type="checkbox"/>	
Grey/White <input type="checkbox"/>	180mm <input type="checkbox"/>	Right <input type="checkbox"/>	Black <input type="checkbox"/>					
Black/White <input type="checkbox"/>	230mm <input type="checkbox"/>		Grey <input type="checkbox"/>					

*Low Threshold has no weathering guarantee and is not recommended for external use or cold bridging
**Standard glazing for bifolds is 28mm, Argon Filled, Black Warmedge, Toughened, u value 1.2

Notes

Once any materials have been ordered, re-works, cut-downs and any alterations will not be possible. Please check the order requirements carefully.

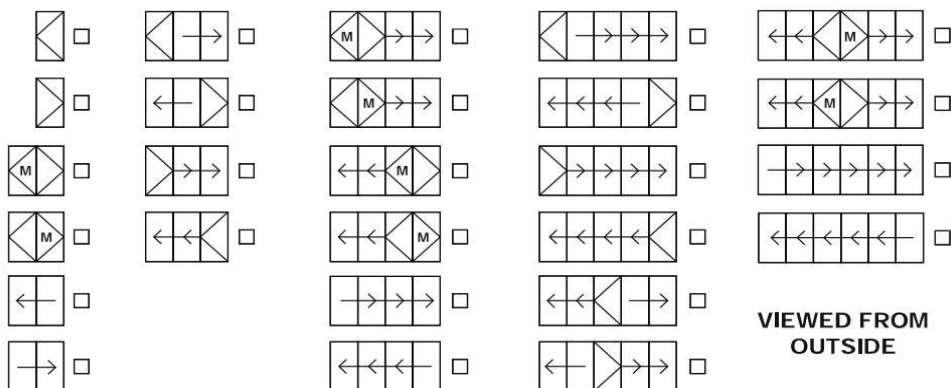

Customer Signature

Date